




# TeeJet® Tank Rinsing Nozzles

## 27500E-TEF


- The 27500 tank rinsing nozzle has a fluid-driven rotational spray head with orifices positioned to provide effective rinsing of sprayer tanks.
- Provides 360° coverage of inside surface of tank.
- Made of corrosion-resistant Teflon® material.
- Mounting connection—3/4" NPT or BSPT (F).



NOZZLE NUMBER	CAPACITY – GPM					TYPE OF COVERAGE	SPRAY ANGLE
	10 PSI	20 PSI	30 PSI	40 PSI	50 PSI		
(B)27500E-3/4-18-TEF	9	12.7	15.6	18	20		360°

(B)=BSPT

### Typical Application

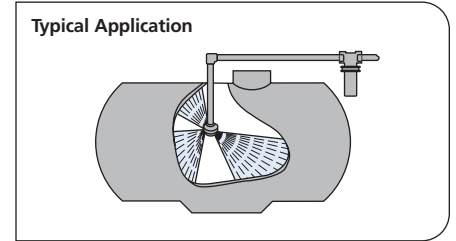

## D25468-POM-7

- The rotary tank rinsing nozzle is used for rinsing the insides of chemical containers and spray tanks up to 6.5 ft. (2.0 m) in diameter.
- Available with 1/2" NPT or BSPT (F) connections.
- Rotating head is driven by the flow of the rinsing liquid, starts at pressure of less than 7 PSI (0.5 bar).



NOZZLE NUMBER	CAPACITY – GPM				
	20 PSI	30 PSI	40 PSI	50 PSI	70 PSI
D(B)25468-POM-7	4.9	6.0	7.0	7.8	9.2

(B)=BSPT

- Self-cleaning sliding bearing.
- Body of Celcon®-Delrin®, flat spray inserts of 303 stainless steel.
- Nozzle fits in 1 1/2" (38 mm) opening.



# TeeJet® Container Rinsing Nozzles

## 23240


- The 23240 container rinsing nozzle is used to rinse residue from containers before disposal.
- Can be used for containers with 1 1/32" (26 mm) diameter openings or larger.
- Three flat spray orifices provide self-rotational forces needed to create spherical coverage.
- Available in 1/2" NPT or BSPT (F) connections.



NOZZLE NUMBER	INLET CONNECTION	CAPACITY – GPM				
		20 PSI	30 PSI	40 PSI	50 PSI	60 PSI
(B)23240-3-HSS-5.7-316SS	1/2" (F)	4.0	4.9	5.7	6.4	7.0
(B)23240-3-HSS-7-316SS		4.9	6.1	7.0	7.8	8.6

(B)=BSPT

### Typical Application



- Made of 316 stainless steel with hardened stainless steel bearings and races for maximum wear life. Also includes an internal sleeve made of Nylon.

## VSM-\*

- Used for inside rinsing of chemical containers.
- 40 orifices combine to produce a 240° spray angle.
- All Nylon construction.
- Available with 1/2" or 3/4" NPT or BSPT (F) connection.
- Recommended operating pressure 30–60 PSI (2–4 bar).



NOZZLE NUMBER	INLET PIPE CONNECTION	ORIFICE DIAMETER	CAPACITY – GPM						SPRAY ANGLE
			20 PSI	30 PSI	40 PSI	60 PSI	80 PSI	100 PSI	
(B) VSM-*-28	1/2" (F)	.031"	3.9	4.8	5.5	6.7	7.8	8.7	240°
(B) VSM-*-44		.039"	6.1	7.5	8.6	10.6	12.2	13.7	
(B) VSM-*-90	1/2" or 3/4" (F)	.059"	12.5	15.3	17.7	22	25	28	
(B) VSM-*-140		.077"	19.4	24	27	34	39	43	
(B) VSM-*-190		.091"	26	32	37	46	53	59	

(B)=BSPT

### How to order:

**(B) VSM – 3/4 – 140**  
 | | | |  
 BSPT Nozzle Type Size Capacity



## Y33180-PP & Y9270-PP


### Features:

- Allows small pumps to circulate large volumes of liquid.
- Manufactured of glass-filled polypropylene for excellent corrosion and chemical resistance.
- Large flow opening minimizes plugging.
- Available in 3/8" or 3/4" (M) pipe thread inlet connection.

### How to order:

Specify nozzle number and inlet connection.

Example: Y33180-PP-3/8

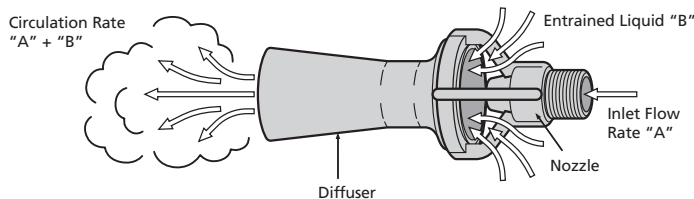

APPROXIMATE FLOW RATE PERFORMANCE	MODEL NUMBER	INLET LIQUID PRESSURE							
		10 PSI	15 PSI	20 PSI	25 PSI	30 PSI	35 PSI	40 PSI	50 PSI
Inlet Flow Rate "A" (l/min)	Y33180-PP	9	11	12.7	14	16	17	18	20
	Y9270-PP	13.5	17	19	21	23	25	27	30
Entrained Liquid "B" (l/min)	Y33180-PP	36	44	50.8	56	64	68	72	80
	Y9270-PP	54	68	76	84	92	100	108	120
Circulation Rate "A" + "B" (l/min)	Y33180-PP	45	55	63.5	70	80	85	90	100
	Y9270-PP	67.5	85	95	105	115	125	135	150

MODEL NUMBER	PIPE THREAD INLET CONNECTION	ORIFICE DIAMETER	LENGTH	DIAMETER
Y33180-PP	3/8" (M)	5/16"	4 1/16"	2 1/16"
Y9270-PP	3/4" (M)	3/8"	6 3/8"	2 29/32"

# TeeJet® Jet Agitators

Installed at bottom of spray tank on end of agitator return line. Continuous solid stream jet flow creates turbulence and keeps wettable powders in suspension.

## 6290-SC

Made in choice of brass, aluminum and all stainless steel. 1/4" NPT (F) inlet connection. Fits through 2" (51 mm) hole. Weight 6 oz. (0.17 kg.). Siphon caps increase liquid flow by venturi action to increase mixing potential.



JET AGITATOR NUMBER	ORIFICE CAP NUMBER	ORIFICE CAP INLET DIAMETER	CAPACITY (GPM) THRU AGITATOR LINE AT VARIOUS PRESSURES						FOR MAX. TANK SIZE IN GALLONS OF:
			10 PSI	15 PSI	20 PSI	30 PSI	40 PSI	50 PSI	
6290SC-1	11118-1	.055"	.78	.96	1.1	1.4	1.6	1.8	50
6290SC-2	11118-2	.086"	1.9	2.3	2.7	3.3	3.8	4.3	110
6290SC-3	11118-3	.096"	2.4	2.9	3.3	4.1	4.7	5.3	140
6290SC-5	11118-5	.144"	4.4	5.4	6.2	7.6	8.8	9.9	250
6290SC-8	11118-8	.156"	5.1	6.3	7.2	8.8	10.2	11.4	300
6290SC-10	11118-10	.177"	5.7	7.0	8.0	9.7	11.4	12.7	350

**Note:** Maximum tank sizes shown in table are approximate and are based on 40 PSI (3 bar) operation with pesticides, not fertilizers.

### How to order:

Specify Jet Agitator number.

Examples:

6290SC-1 – Brass

6290SC-1-AL – Aluminum

6290SC-1-SS – Stainless Steel

Other sizes available.